

## DLU-25/30/40 TOUCH II LOW SPIN WASHER EXTRACTORS



### TOUCH II

User friendly and totally programmable 7" Touch II USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions, etc.) 37 languages 8 dosing signals as standard



### G FACTOR

High G-Factor: G-FACTOR 200 for low spin washers



### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



### VERSATILITY

Make to order: customisation  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



### CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Biggest door diameters: Ø373 (for DLU-25/30) and Ø460 (for DLU-40)  
Easy opening/closing system for door lock



### MAINTENANCE

Hinged panel: easy access to parts  
Equivalent parts for all models: contactors, electronic devices, gear  
Technical menu: traceability, error diagnosis



### OTHERS


Grey skinplate body  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control.  
CE and WRAS approved product. Option ETL



### OPTIONS

- Double drain
- External double drain 3" (recommended for DLS-25/30)
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- SLUICE: model with 8mm drum holes
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz  
No neutral
- Coin / token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	DLU - 25 TOUCH II	DLU - 30 TOUCH II	DLU - 40 TOUCH II			
<b>DRUM</b>							
Load capacity 1:9 / 1:10	lb	24/22	31/29	44/42			
Volume	CU.FT	3.5	4.5	6			
Diameter	in	3.5	4.5	6			
Depth	in	13	16.92	18.50			
<b>GENERAL DETAILS</b>							
Washing speed/ Spinning speed	r.p.m.	53/759	53/759	50/714			
Factor G	-	200	200	200			
Maximum force transmitted	KN	2,0 ±3	2,31 ±4	2,63 ±5			
Frequency-dynamic force	Hz	8,93	8,93	8,42			
Noise level	dB	<70	<70	<70			
Coin laundry version	-	Yes	Yes	Yes			
Double drain	-	Opt (external)	Opt (external)	Opt			
Weighing system / Tilting system	-	No/No	No/No	No/No			
SLUICE - Option 8mm holes drum	-	Yes	Yes	Yes			
<b>DOOR</b>							
Height center door/ Height door	in	22.44/12.20	22.44/12.20	25.78/13.70			
Diameter	in	14.68	14.68	18.11			
<b>POWER</b>							
Motor	Hp	1,48	1,48	2,9			
Electric heating power	kW	6	9	12			
Total electric power (electric model)	kW	6,25	9,5	12,75			
Total electric power (hw, steammodel)	kW	1,1	1,1	2,15			
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>
Tensión 230V- I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A
Tensión 230V- III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-
Tensión 400V- III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-
Steam inlet (Steam model)	inch	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Maximum steam consumption (Steam model)	lbs/h	15.5	15.5	18.8	18.8	26.5	26.5
Water inlet	inch	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Water main pressure	Kg/cm²	2-4	2-4	2-4	2-4	2-4	2-4
Maximum water consumption*	Gal/h	15.80	15.80	21	21	31.35	31.35
Drain	inch	3"	3"	3"	3"	3"	3"
Drainage capacity	Gal/min	52.8	52.8	52.8	52.8	52.8	52.8
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net Width / Gross Width	in	28.3/31.5	28.3/31.5	28.3/31.5	28.3/31.5	31/33	31/33
Net Depth / Gross Depth	in	26.4/39	26.4/39	32.67/39	32.67/39	33/39.76	33/39.76
Net Height / Gross Height	in	45.59/53.14	45.59/53.14	45.59/53.14	45.59/53.14	51.45/59	51.45/59
Net weight / Gross weight	lbs	478/496	478/496	526/545	526/545	620/664	620/664
Volume	ft3	37.8	37.8	37.8	37.8	46	46

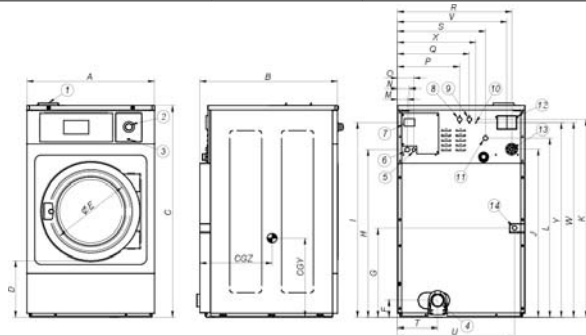

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

\* N°20 Program, 75% load

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DLS-11	719	684	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.073	424	1.118	383	511
DLS-14	719	830	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.073	424	1.118	484	524
DLS-18	788	840	1.307	348	460	108	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.203	485	1.202	479	546

DOMUS

